



FREE ENERGY

**OBNOVLJIVI IZVORI
ENERGIJE**



HIGH LEVEL ENERGY

Trojan
BATTERY COMPANY
**Solarna energija
Čista energija**



SOLARNA BATERIJA - AKUMULATOR AGM VRLA / TROJAN - 31-AGM

SOLARNE BATERIJE - AGM VRLA AKUMULATORI / PROIZVODNJA ELEKTRIČNE ENERGIJE

SOLARNE BATERIJE - TROJAN / AGM VRLA DCV 6, 12 / Ah 76, 100, 130



GARANCIJA KVALITETA

VISOK NIVO ENERGIJE

31-AGM



**MADE IN
USA**

KOMPONENTE ZA SOLARNI SISTEM - OFF GRID

"NEKA SUNCE FINANSIRA VAŠE RAČUNE"

Sa našim dugogodišnjim iskustvom u upotrebi solarnih tehnologija,
ODABRALI SMO NAJBOLJE ZA VAS - 100% KVALITET

Protected motto & Text - All rights reserved ©

www.unissgrejanje.com



UNISS COM LAB d.o.o. Petra Dobrnjca 151, 12300 Petrovac na Mlavi, Administrativni rukovodilac: Mirjana Ilić, Tel. 012/328-023; Mob. 065/53-20-551
Direktor: Srbojlbub Ilić, Mob. 065/53-20-550; 063/800-73-17, E-mail: uniss.grejanje@gmail.com, www.unissgrejanje.com, www.westech-solar.rs

MODEL: 31-AGM

VOLTAGE: 12

DIMENSIONS: Inches (mm)

BATTERY: VRLA AGM

COLOR: Maroon (case/cover)

MATERIAL: Polypropylene

WATERING SYSTEM: N/A

DESIGN LIFE: 10 Years



PRODUCT SPECIFICATIONS

BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes	CRANKING Performance		CAPACITY ^B Amp-Hours (AH)				ENERGY (kWh)	TERMINAL Type ^E	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	C.C.A. ^D @0°F	C.A. ^E @32°F	5-Hr Rate	10-Hr Rate	20-Hr Rate	100-Hr Rate	100-Hr Rate		Length	Width	Height ^F	
		12 VOLT DEEP CYCLE AGM BATTERY												
31	31-AGM	177	600	720	82	92	100	111	1.33	6	13.44 (341)	6.81 (173)	9.18 (233)	69 (31)

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 77°F (25°C) for AGM Lines and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Dimensions are based on nominal size. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7 mm) spacing minimum.
- D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.
- E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- G. Terminal images are representative only.
- Trojan's battery testing procedures adhere to BCI-05 (Rev Oct 09) and IEC 61427 test standards.

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)				
System Voltage	12V	24V	36V	48V
Absorption Charge	14.1 – 14.7	28.2 – 29.4	42.3 – 44.1	56.4 – 58.8
Float Charge	13.5	27	40.5	54

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.


CHARGING TEMPERATURE COMPENSATION

.028 VPC for every 10°F (5.55°C) above or below 77°F (25°C) (add .028 VPC for every 10°F (5.55°C) below 77°F and subtract .028 VPC for every 10°C above 77°F).

OPERATIONAL DATA


Operating Temperature	Self Discharge
-4°F to 131°F (-20°C to +55°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	Less than 3% per month depending on storage temperature conditions.

TERMINAL CONFIGURATIONS


6	DT	Automotive Post & Stud Terminal
		
Terminal Height Inches (mm) .79 (20) Torque Values in-lb (Nm) Bolt: 95 – 105 (11 – 12) AP: 50 – 70 (6 – 8) Bolt Size 5/16 – 18		

31-AGM DATA SHEET


BATTERY DIMENSIONS (shown with DT)

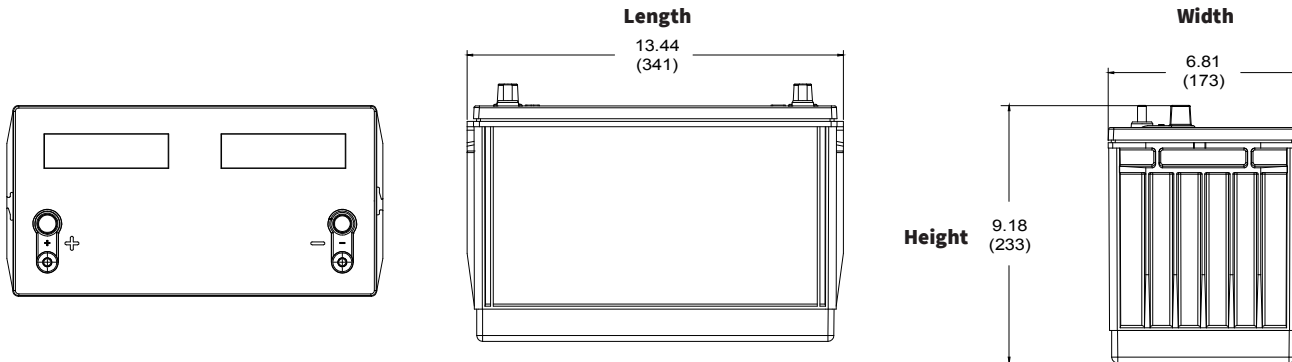

TROJAN 31 AGM PERFORMANCE

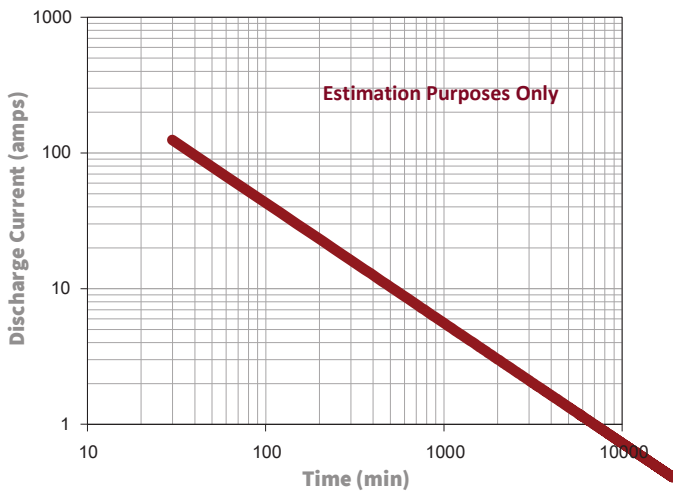

PERCENT CAPACITY VS. TEMPERATURE

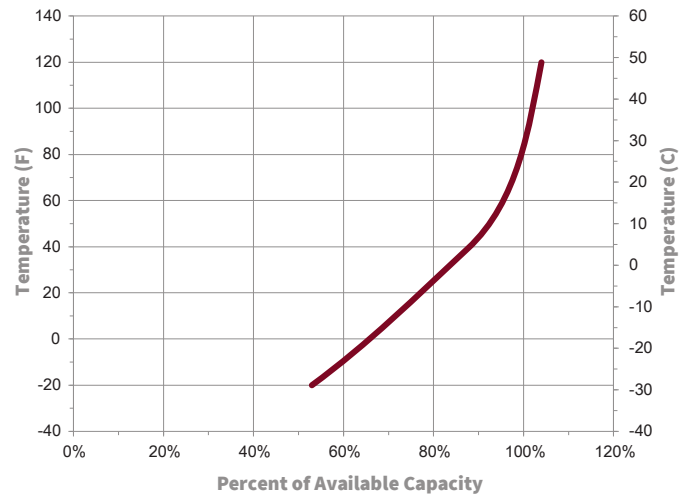

Trojan's battery testing procedures adhere to BCI-05 (Rev Oct 09) and IEC 61427 test standards.

**TROJAN BATTERY
COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2008 =**

