



FREE ENERGY
OBNOVLJIVI IZVORI
ENERGIJE



SOLARNE VAKUUMSKE CEVI - WesTech Solar SP-S70 **TEHNIČKI DETALJI - KARAKTERISTIKE**



GARANCIJA KVALITETA - WesTech Solar



Heat-Pipe
14 X 90 mm

OBNOVLJIVI IZVORI ENERGIJE

"NEKA SUNCE FINANSIRA VAŠE RAČUNE"®

Sa našim dugogodišnjim iskustvom u upotrebi solarnih tehnologija,
ODABRALI SMO NAJBOLJE ZA VAS - 100% KVALITET www.unissgrejanje.com

Protected motto & Text - All rights reserved ©

Ekskluzivni distributer za Srbiju

UNISS COM LAB d.o.o. Petra Dobrnjca 151, 12300 Petrovac na Mlavi, Administrativni rukovodilac: Mirjana Ilić, Tel. 012/328-023; Mob. 065/53-20-551
Direktor: Srbojlbub Ilić, Mob. 065/53-20-550; 063/800-73-17, E-mail: uniss.grejanje@gmail.com, www.unissgrejanje.com, www.westech-solar.rs



GARANCIJA KVALITETA - WestTech Solar

SOLARNE VAKUUMSKE CEVI-Heat pipe / WestTech Solar SP-S70

TEHNIČKI DETALJI - KARAKTERISTIKE

IZVANREDNE PERFORMANSE:

- Inovacija u tehnologiji superprovodljivosti posebno dizajnirana za lošije sunčeve uslove sunčevog zračenja
- Nije potrebno održavanje

BRZA I LAKA MONTAŽA:

- Svi delovi kolektora mogu pojedinačno da se prebace na krov radi lakšeg sklapanja kolektorske konstrukcije
- Vakuumske cevi Heat pipe sa kondenzatorom se jednostavno priključuju u Cu čaure kolektorskog priključnog sabirnika

OTPORAN NA VREMENSKE USLOVE:

- Otporan na grad od 35 mm u prečniku, vetrove od 130 km/h i opterećenje snega od 1000 Pa

IZDRŽLJIV I ELEGANTAN:


- Desetogodišnja garancija, pored dugog radnog veka
- Najbolje funkcioniše postavljen na južnoj strani ili se može adaptirati da funkcioniše na jugoistočnoj/jugozapadnoj strani sa radnim uglovima od 20° - 70°
- Mogućnosti za montažu – kolektorska konstrukcija fiksira se direktno na kosi krov ili ravnu površinu
- Dostupni podesivi Al-okviri za ravne krovove i ravne betonske površine ili montažu na zemlji/travnjaku

U POTPUNOSTI U SKLADU SA SVETSKIM STANDARDIMA:

Evropska norma za kvalitet - EN12975 ; BAFA Nemačka Solar Keymark ; SPF Švajcarska ; DIN CERTCO Nemačka ISO9001 Certificate
Testira i kontroliše "FRAUNHOFER Institut Solare Energiesysteme" ISE - Nemačka



SOLARNA VAKUUMSKA CEV SA APSORBEROM HEAT PIPE: MODEL SP-S70

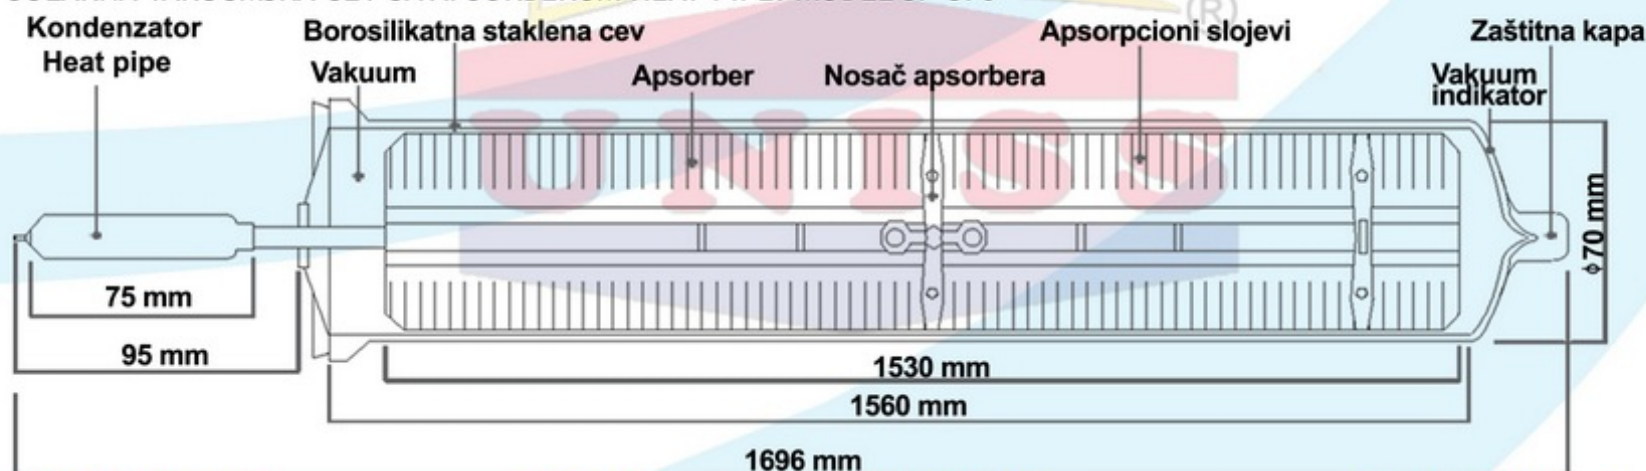

Veličina kondenzatora	φ14 × 75 mm	Apsorpcioni slojevi	ALN/AIN - SS/CU
Dužina staklene vakuumske cevi	1700 mm	Koeficijent apsorpcije	>95%
Spoljašnji prečnik vakuumske cevi	φ70 mm	Koeficijent emisije	<5%
Debljina stakla	2 mm	Vakuum	P<3.5 × 10 Pa
Vrsta stakla	Borosilikatno staklo 3.3	Težina	2.21 kg
Apsorber	Cu Bakar	Proizvodnja tople vode (17Mj/m ² .danΔT=45°C)	10L
Tip apsorbera	Heat pipe	Temperatura stagnacije - Heat pipe	255°C

